PRODUCT SHEET

OPPY

T-SHIRT

EN ISO 20471 (2013) + A1 (2016) 2

EN ISO 11612 (2015) A1, B1, C1


EN 1149-5 (2018)

EN 61482-2 (2020) APC 1

PPE CATEGORY 3 WITH ARC PROTECTION




THE + PRODUCTS

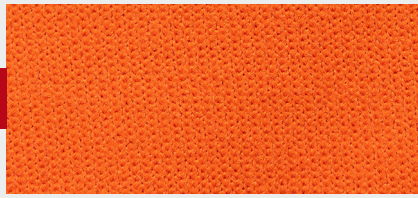

Flame retardant and antistatic: Double-sided jersey knit 50% FR polyester, 29% modacrylic, 20% cotton, 1% fibrecarbon grid (220 g/sqm).



Lock systems for detectors.

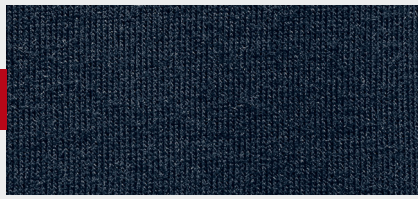

Contrasting color on the most exposed areas.



TSHIROPPY01JM



TSHIROPPY01OM

S to 3XL
Other size, on demand.

According to ISO 6330 6N.

Box of 50.
Individual transparent packaging.

PRODUCT DESCRIPTION

- Category 3 PPE with ARC ELECTRIC protection.
- Flame retardant and antistatic.
- Fitted sleeves.
- Round collar made in the mesh of the t-shirt.
- Offset tabs for sensors.
- Sleeve cuffs tightened with a cuff made in the tee-shirt knit.
- Bottom of t-shirt finished with a cover stitch.
- Two RETHIOTEX® 26 535-01 segmented microbead heat-bonded retroreflective half straps.
- Two RETHIOTEX® 26 535-01 segmented microbead retroreflective thermobonded waistbands.
- Two RETHIOTEX® 26 535-01 segmented microbead retroreflective armbands heat-bonded to each sleeve.
- Standards pictograms on left sleeve when worn.

RAW MATERIALS

OUTER FABRIC

- Double-sided jersey knit 50% FR polyester, 29% modacrylic, 20% cotton, 1% fibrecarbon grid (220 g/sqm).
- Jersey knit 60% modacrylic, 39% cotton,1% anti-static fibers (160 g/sqm).

RETROREFLECTIVE TRANSFER

- RETHIOTEX® 26 535-01 FR segmented microbeads retroreflective heat transfer.

COMPLIANCE

Compliance with the essential safety requirements has been verified using the following harmonised standards:

- **EN ISO 13688 (2013) + A1 (2021)** for protective clothing - general requirements.
- **EN ISO 20471 (2013) + A1 (2016)** for high visibility warning clothing.
- **EN ISO 11612 (2015)** for clothing to protect against heat and flame.
- **EN 1149-5 (2018)** for protection against electrostatic discharges.
- **EN 61482-2 (2020)** for live working. Protective clothing against the thermal hazards of an electric arc. Part 2: requirements.

CUSTOMIZATION

CHEST HEART SIDE



Maximum dimensions:
80 x 50 mm
60 x 60 mm

BACK



Maximum dimensions:
200 x 100 mm
150 x 150 mm

Before going into production, we make a proof of concept from the vector file (vectorised .eps, .ai, .pdf) you send us.

Certain technical requirements may prevent us from printing in the desired location. **OTHER MARKING, PLEASE CONTACT US.**

Paper recycling

10/15/2024 FT DM 1607/01. Photos and texts not contractually binding.