PRODUCT SHEET

LOKI

SWEAT

EN ISO 20471 (2013) + A1 (2016) 3

EN ISO 11612 (2015) A1, B1, C2, F1

EN 1149-5 (2018)


EN 61482-2 (2020) APC 1

PRO

PPE CATEGORY 3 WITH ARC PROTECTION. PPE FOR USE IN ATEX ENVIRONMENTS



THE + PRODUCTS

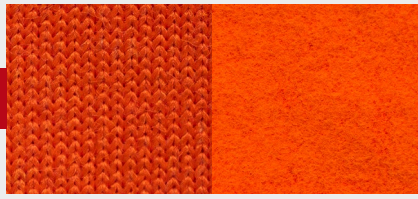

COMFORTABLE: One-sided brushed fleece 37% FR polyester, 37% modacrylic, 25% cotton, 1% AS.



High collar with zip closure.



Lock systems for detectors.



SWEATLOKI01JM



SWEATLOKI01OM

S to 3XL
Other size, on demand.

According to ISO 15797 Method 8A.

Box of 20.
Individual transparent packaging.

PRODUCT DESCRIPTION

- Category 3 PPE with ARC ELECTRICAL protection.
- Suitable for ATEX environments.
- High visibility, non-flammable and antistatic.
- Industrial maintenance possible.
- Fitted sleeves.
- High collar closed by a zip hidden under a wide protective placket.
- Remote microphone tabs for detectors.
- Sleeve cuffs tightened with a cuff made from the sweatshirt fleece.
- Sweatshirt hem finished with a cover stitch.
- Back protector.
- Shoulder reinforcements for hanger use during industrial maintenance.
- Two RETHIOTEX® 26 500-01 segmented microbead heat-bonded retroreflective half straps.
- Two RETHIOTEX® 26 500-01 segmented microbead retroreflective thermobonded waistbands.
- Two RETHIOTEX® 26 500-01 segmented microbead retroreflective armbands, heat-sealed.
- Standards pictograms on left sleeve when worn.

RAW MATERIALS

OUTER FABRIC

- Molleton gratté 1 face 37% polyester FR, 37% modacrylique, 25% coton, 1% AS (330 g/m²).

RETROREFLECTIVE TRANSFER

- RETHIOTEX® 26 500-01 microbeads retroreflective transfer. 70 washing cycles at 60°C (according to ISO 6330 6N).

COMPLIANCE

Compliance with the essential safety requirements has been verified using the following harmonised standards:

- **EN ISO 13688 (2013) + A1 (2021)** for protective clothing - general requirements.
- **EN ISO 20471 (2013) + A1 (2016)** for high visibility warning clothing.
- **EN ISO 11612 (2015)** for clothing to protect against heat and flame.
- **EN 1149-5 (2018)** for protection against electrostatic discharges.
- **EN 61482-2 (2020)** for live working. Protective clothing against the thermal hazards of an electric arc. Part 2: requirements.

CUSTOMIZATION

CHEST HEART SIDE





Maximum dimensions:
80 x 50 mm
60 x 60 mm

BACK





Maximum dimensions:
200 x 100 mm
150 x 150 mm

Before going into production, we make a proof of concept from the vector file (vectorised .eps, .ai, .pdf) you send us.

Certain technical requirements may prevent us from printing in the desired location. **OTHER MARKING, PLEASE CONTACT US.**

Paper recycling

04/18/2025 FT DM 1606/02. Photos and texts not contractually binding.

T2S - Z.I. La Vaure - B.P. 20930 - 42290 SORBIERS - FRANCE
+33 (0)4 77 53 05 05
info@t2s.fr
T2S.FR